

Industrial PC

EPC/PPC-A8-050-C



PN: CS80480T050

Content can change at anytime, check our website for latest information of this product. **www.chipsee.com**

Contents


EPC/PPC-A8-050-C	3
1. Product Overview	7
2. Ordering Options	8
2.1. Operating System	8
2.2. Optional Features	9
3. Hardware Features	10
4. Power Input	12
5. Touch Screen	13
6. Connectivity	14
6.1. RS232/RS485/CAN	14
6.2. USB Connectors	16
6.3. LAN Connectors	17
6.4. Expansion Port	18
7. TF Card Slot	19
8. Audio Connectors	20
9. Boot DIP Switch	21
10. Mounting Procedure	22
11. Mechanical Specifications	23
11.1. EPC-A8-050-C	23
11.2. PPC-A8-050-C	23
12. 3D Model	25
13. Disclaimer	26
14. Technical Support	26

EPC/PPC-A8-050-C


Front View



Rear View

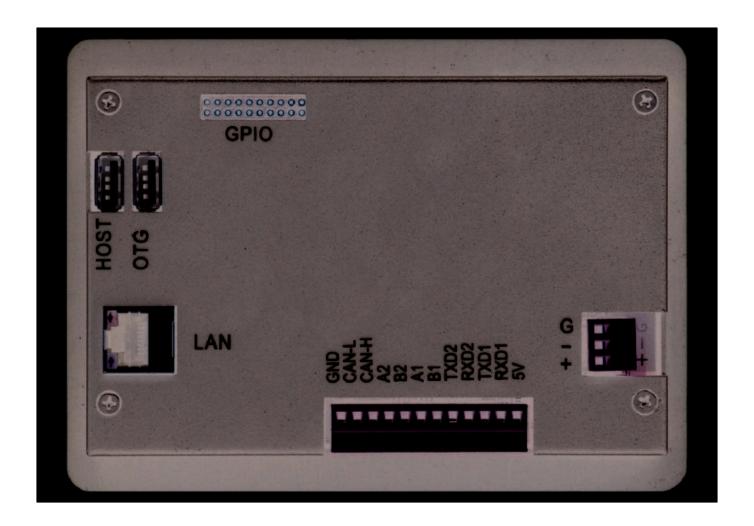

Front View (Embedded Variant)

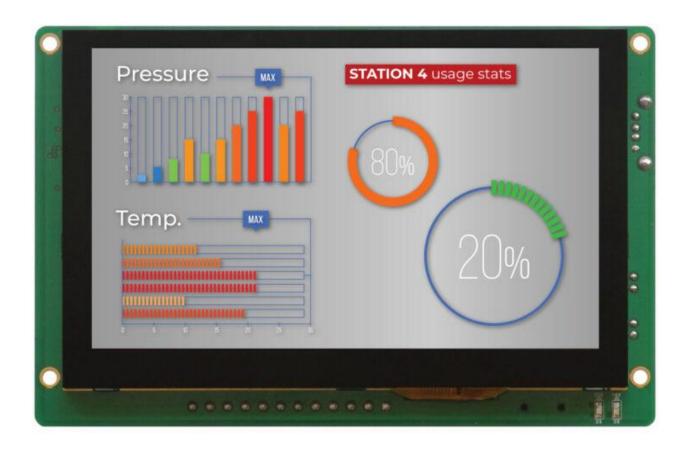

Rear View (Embedded Variant)



EPC/PPC-A8-050-C Product Overview

Product Overview

The Cortex[®]-A8 series EPC/PPC-A8-050-C (PN: CS80480T050) is a high-quality industrial PC. This single board computer features a 5.0" ten-point capacitive and resistive touch screen with a resolution of 800 x 480 pixels and brightness of 250 cd/m 2 .

Key Applications

- Human Machine Interface HMI
- Process Control
- Process Monitoring
- HMI
- Infotainment
- Predictive Maintenance
- Machine Learning
- Machine Vision
- Automotive applications
- Gaming...

It is available both as an embedded solution and as a device hosed in an aluminum casing with bezels, thus facilitating different installation options:

- Installation on an industrial cabinet.
- Integration with the existing equipment

The EPC/PPC-A8-050-C Industrial PC is based around the powerful CS-SOM335X-V3 System on Module (SoM), powered by the AM3354 Arm[®] Cortex[®]-A8 microprocessor unit (MPU). The AM33554 MPU is enhanced with image, graphics processing, peripherals and industrial interface options such as EtherCAT and PROFIBUS. The devices support high-level operating systems (HLOS).

The microprocessor unit (MPU) subsystem is based on the ARM Cortex-A8 processor and the PowerVR SGX™ Graphics Accelerator subsystem provides 3D graphics acceleration to support display and gaming effects.

The AM33554 MPU does not generate extensive heat, so even the thin aluminum housing on PPC version delivers sufficient thermal dissipation.

EPC/PPC-A8-050-C Ordering Options

Ordering Options

Chipsee products can be customized during the ordering process. The product will be shipped with the pre-installed factory defaults if no extra requirements are specified. The table in the Hardware Features section provides information about the default options bundled with the product.



Note

You can order EPC/PPC-A8-050-C from the official Chipsee Store or from your nearest distributor.

Operating System

This product comes with a pre-installed OS of your choice. Please see the list below for the supported OSes, which can be also obtained from the Software Documentation section, along with the detailed installation instructions.

- Android 4.1
- Linux with Qt 4.8
- Linux with Qt 5.5
- Debian 7.4
- · Debian 8.4
- Angstorm v2012.12



Warning

The Software Documentation section provides a detailed instruction how to install different OS on your own. However, bear in mind that Chipsee can't take the responsibility of inadequate installation procedure. If you "brick" your device, please contact Chipsee Technical Support at support@chipsee.com for further assistance

EPC/PPC-A8-050-C **Optional Features**

Optional Features

The EPC/PPC-A8-050-C Industrial PC does not include WiFi/BT and/or 3G/4G modules by default. These modules are optional and can be selected at the Chipsee store during the ordering process.



Warning

Installation, repair, and maintenance tasks should be performed by trained personnel only. Chipsee does not bear any responsibility for damage caused by inadequate handling of the product. EPC/PPC-A8-050-C Hardware Features

Hardware Features

The EPC/PPC-A8-050-C Industrial PC offers a board range of performance and connectivity options for scalable integration, providing expandability according to future needs. Some of the key features are listed in the table below.

EPC/PPC-A8-050-C			
СРИ	AM3354ZCZ100, Arm [®] Cortex [®] -A8, 1GHz		
RAM	512MB DDR3		
eMMC	4GB		
Storage	TF Card, Supports up to 32GB SDHC		
Display	5.0" LCD, 800 x 480 resolution px, brightness 250 cd/m ²		
Touch	10-point capacitive and resistive touch		
USB	1 x USB 2.0 Host, 1 x USB OTG		
LAN	1 x Channel 100M LAN		
Audio	3.5mm Audio In/Out Connector		
Buzzer	Yes		
RTC	Yes		
RS232	2 x RS232		
RS485	2 x RS4851		
CAN	1 x CAN1		
GPIO	8 Channels		
WiFi/BT	USB WiFi (optional)		
Expansion Port 1 x 20-pin (PCB Footprint)			
3G/4G/LTE	N/A		
Power Input	From 6V to 36V		
Current at 12V	400mA Max		
Power Consumption	3.5W Typical		
Working Temperature	From -20°C to +70°C		
os	Multiple Choices (Operating System)		
Dimensions	EPC-A8-050-C (PN: CS80480T050E): 134.2 x 86.82 x 28mm		
	PPC-A8-050-C (PN: CS80480T050P): 150 x 110 x 26.5mm		
Weight	EPC-A8-050-C (PN: CS80480T050E): 210g		
Weight	PPC-A8-050-C (PN: CS80480T050P): 440g		

EPC/PPC-A8-050-C Hardware Features

EPC/PPC-A8-050-C		
Mounting	EPC-A8-050-C (PN: CS80480T050E): Embedded	
	PPC-A8-050-C (PN: CS80480T050P): Panel	

Table 234 Key Features

1(1,2)The RS485 and CAN channels may be customized to the following arrangement:

- 2 x RS485, 1 x CAN (Default)
- 1 x RS485, 2 x CAN

EPC/PPC-A8-050-C Power Input

Power Input

The EPC/PPC-A8-050-C Industrial PC can be powered by a wide range of input voltages: From 6V to 36V DC. The power input connector is a **3-pin, 3.81mm terminal**. The polarity and the pinout is clearly marked on the housing of the PPC version, as well as on the PCB itself of the EPC version, as shown in the figure below.

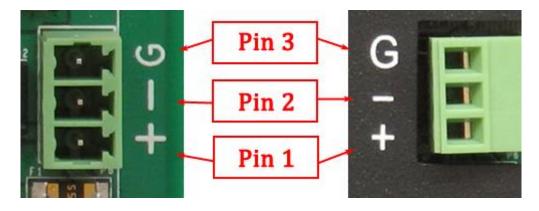


Figure 670: Power Input (embedded/enclosed version)

Note that the "+" sign represents the positive power input, and it is printed both at the casing and as a silk-screen on a PCB of the embedded version. The "-" terminal is shorted to the ground.

Power Input Definition			
Pin Number Definition Description		Description	
Pin 1	Positive Input	DC Power Positive Terminal	
Pin 2	Negative Input	DC Power Negative Terminal	
Pin 3	Ground	Power System Ground	

Table 235 Power Connector



The system ground " \mathbf{G} " is connected to power negative "-" on board.

EPC/PPC-A8-050-C Touch Screen

Touch Screen

The EPC/PPC-A8-050-C Industrial PC uses a 10-point capacitive and resistive touch screen. The figure below shows the capacitive or resistive screen connected to the motherboard via the **FPC connector**.




Figure 671: Capacitive or Resistive Touch Connector



Attention

A capacitive touch screen is susceptible to power noise and Electromagnetic Radiation (EMR). It may cause LCD ripples or even capacitive touch malfunction. If using a capacitive multi-touch test application, you might notice the touch points float erratically across the display. There are several solutions to this problem:

- 1. Use a high-quality Power Adapter Unit (PSU) with low EMR. You can also provide power from a battery.
- 2. Make sure that the EPC/PPC-A8-050-C Power Input connector (pin 3) is properly connected to the Power System Ground to provide sufficient EMI shielding and eliminate the problem entirely.
- 3. Bad GND problem can also be confirmed by touching pin 3 of the Power Input connector with one hand while operating the capacitive touch screen with the other hand. In this case, the operator's body acts as the Power System Ground.

EPC/PPC-A8-050-C Connectivity

Connectivity

There are many connectivity options available on the EPC/PPC-A8-050-C industrial PC. It has $1 \times USB = 2.0 + 1 \times USB = 1.00 \times 1$

RS232/RS485/CAN

The serial communication interfaces (RS485, RS232, and CAN) are routed to a **12-pin 3.81mm terminal**, as illustrated on the figure below.

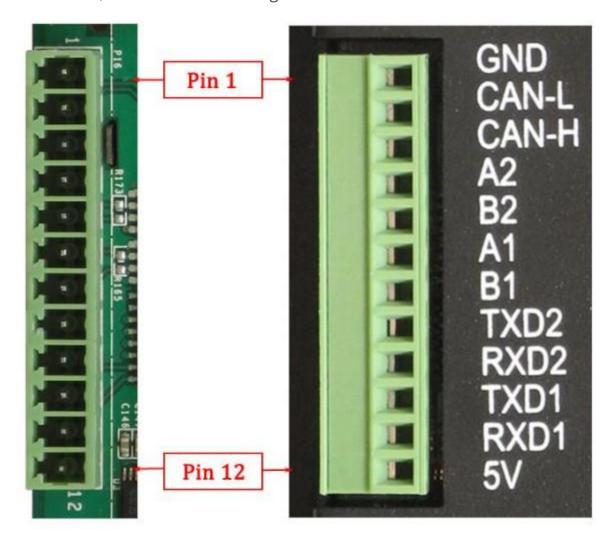


Figure 672: Relation between serial pins on embedded vs. enclosed version of the **EPC/PPC-A8-050-C**Industrial PC

The table below offers more detailed description of every pin and its definition:

RS232 / RS485 / CAN Pin Definition:			
Pin Number	Definition	Description	
Pin 12	+5V	Isolated +5V Power Output, No more than 200mA Current output	

EPC/PPC-A8-050-C RS232/RS485/CAN

RS232 / RS485 / CAN Pin Definition:			
Pin 11	RXD1	UARTO of CPU, RS232 RXD Signal	
Pin 10	TXD1	UART0 of CPU, RS232 TXD Signal	
Pin 9	RXD2	UART1 of CPU, RS232 RXD Signal	
Pin 8	TXD2	UART1 of CPU, RS232 TXD Signal	
Pin 7	B1	UART2 of CPU, RS485 B Signal	
Pin 6	A1	UART2 of CPU, RS485 A Signal	
Pin 5	B2	UART4 of CPU, RS485 B Signal	
Pin 4	A2	UART4 of CPU, RS485 A Signal	
Pin 3	CAN_H	DCAN0 of CPU, CAN H Signal	
Pin 2	CAN_L	DCAN0 of CPU, CAN L Signal	
Pin 1	GND	Isolated Ground Output	

Table 236 Connectivity Section

EPC/PPC-A8-050-C USB Connectors

USB Connectors

There are 2 x Type A **USB HOST connectors** onboard, as shown on the figure below.




Figure 673: USB HOST Connectors (embedded/enclosed PC version)



The OTG Connector is defined as HOST by default. If customer needs it work as OTG (slave), please solder a 0Ω 0603 Package Resistor to **R119** and **R121** as shown in the above.

Warning

Be careful not to touch surrounding electronic components accidentally while plugging in USB devices into the embedded Industrial PC version.

EPC/PPC-A8-050-C LAN Connectors

LAN Connectors

LAN (RJ45) connector provides Ethernet connectivity over standardized Ethernet cables as shown the figure below. The integrated Ethernet interface supports up to 1 Gbps data throughput.




Figure 674: RJ45 LAN Connectors (embedded/enclosed PC version)



Use CAT5 or better cables to achieve full data throughput over maximum distance defined by the 1000BASE-T standard (100m).

EPC/PPC-A8-050-C Expansion Port

Expansion Port

The EPC/PPC-A8-050-C Industrial PC has 1 x **Expansion Port** as shown on the figure below. It is an unpopulated PCB footprint with the standard 2.54mm (1") pitch holes. The Expansion Port provides direct access to some of the processor pins, as described in the table below.




Figure 675: Expansion Port

Expansion Connector Pinout					
PIN	Function	CPU PIN	PIN	Function	CPU PIN
1	GND	Power Ground	2	VDD_5V0	+5V Power
3	GND	Power Ground	4	VDD_3V3	+3.3V Power
5	GPMC_A1	V14	6	GPMC_A3	T14
7	GPMC_A2	U14	8	GPMC_A5	V15
9	GPMC_A4	R14	10	GPMC_A7	T15
11	GPMC_A6	U15	12	GPMC_A8	V16
13	SPI0_D1	B16	14	SPI0_D0	B17
15	SPIO_CS0	A16	16	SPIO_CLK	A17
17	AIN4	C8	18	AIN5	B8
19	AIN6	A8	20	AIN7	C9

Table 237 Expansion Connector Pinout



Warning

Since the PCB traces of the port are connected to the processor directly, be careful not to cause electrostatic discharge or over voltage on the pins, as it may damage the processor. Take all the necessary precautions while working with electrostatic-sensitive equipment.

EPC/PPC-A8-050-C TF Card Slot

TF Card Slot

The EPC/PPC-A8-050-C Industrial PC features 1 x **TF Card (micro SD) slot**. It can address up to 32GB of memory.






Figure 676: TF (micro SD) Card Slot



The product does not come shipped with the TF Card by default.

EPC/PPC-A8-050-C Audio Connectors

Audio Connectors

The EPC/PPC-A8-050-C Industrial PC features some audio peripherals, as well. It has 1 x **3.5mm audio input jack** and 1 x **3.5mm audio output jack**.

On the embedded panel PC version, the pink connector is the audio input jack (line-in) and the blue connector is the audio output jack (line-out, typically around -10 dBV). On the enclosed panel PC version, both audio input and audio output are clearly marked on the figure below.

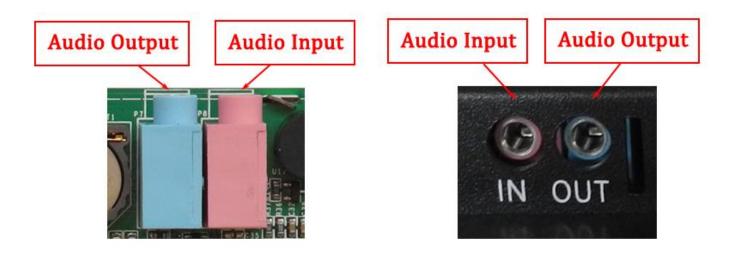


Figure 677: Audio I/O (embedded/enclosed PC version)

EPC/PPC-A8-050-C Boot DIP Switch

Boot DIP Switch

The EPC/PPC-A8-050-C Industrial PC supports boot from SD card. If you want to reflash the Operating System (OS), you can use the TF card for that purpose, combined with the **DIP switch** settings as illustrated in the figure below.

There is no need to alter the DIP switch settings during regular operation. However, if you need to reinstall the OS, please refer to the table below. Detailed information on how to reflash the OS can be found in the Software Documentation.





Figure 678: Boot DIP Switch

Boot Config Select				
DIP SW	1	2	3	4
SD	1	0	0	0
еММС	1	1	0	1
Download	0	1	1	0

Table 238 Boot Configuration Selection

EPC/PPC-A8-050-C Mounting Procedure

Mounting Procedure

The EPC/PPC-A8-050-C Industrial PC can be mounted with 4 x M4 screws, enabling simplified installation onto any standard mounting fixture. Other mounting options might also be supported according to the table in the Hardware Features section.

You can find detailed information about mounting in the Mount IPC Guide.

EPC/PPC-A8-050-C Mechanical Specifications

Mechanical Specifications

EPC-A8-050-C

The outer mechanical dimensions of EPC-A8-050-C are $134.2 \times 86.82 \times 28$ mm (W x L x H). Please refer to the technical drawing in the figure below for details related to the specific product measurements.

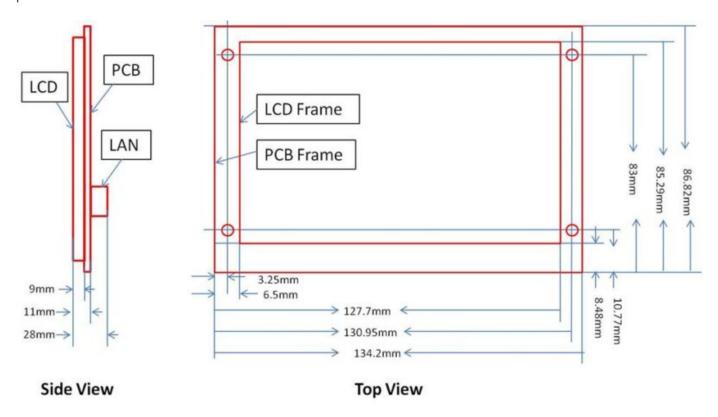


Figure 679: EPC-A8-050-C Technical Drawing

PPC-A8-050-C

For PPC-A8-050-C, the outer mechanical dimensions are $150 \times 110 \times 26.5 \text{mm}$ (W x L x H).

EPC/PPC-A8-050-C PPC-A8-050-C

Panel Mounting







Figure 680: Fixing PPC-A8-050-C industrial PC into panel



With the PPC-A8-050-C industrial PC, the operator can fix the PC into the panel by pushing it from the front inside the panel as described in the figure above. The recommended maximum thickness of the panel material is 8mm.

- 1. Make sure the Panel PC is configured correctly. The Boot Switch is sitting inside the housing. To use it, the Panel PC has to be unmounted from the panel.
- 2. Push the Panel PC straight into the Panel Hole until the unit sits flat on the panel as shown in the figure above.
- 3. Use the mounting fixtures to lock the Panel PC into it's place.

EPC/PPC-A8-050-C 3D Model

3D Model

EPC/PPC-A8-050-C 3D model can be viewed in the online doc in a web browser, **if you are reading from the PDF** version, please visit the online doc EPC/PPC-A8-050-C, select hardware documentation, drag the navigation bar to the 3D Model section.

EPC/PPC-A8-050-C Disclaimer

Disclaimer

This document is provided strictly for informational purposes. Its contents are subject to change without notice. Chipsee assumes no responsibility for any errors that may occur in this document. Furthermore, Chipsee reserves the right to alter the hardware, software, and/or specifications set forth herein at any time without prior notice and undertakes no obligation to update the information contained in this document.

While every effort has been made to ensure the accuracy of the information contained herein, this document is not guaranteed to be error-free. Further, it does not offer any warranties or conditions, whether expressed orally or implied in law, including implied warranties and conditions of merchantability or fitness for a particular purpose. We specifically disclaim any liability with respect to this document, and no contractual obligations are formed either directly or indirectly by this document.

Despite our best efforts to maintain the accuracy of the information in this document, we assume no responsibility for errors or omissions, nor for damages resulting from the use of the information herein. Please note that Chipsee products are not authorized for use as critical components in life support devices or systems.

Technical Support

If you encounter any difficulties or have questions related to this document, we encourage you to refer to our other documentation for potential solutions. If you cannot find the solution you're looking for, feel free to contact us. Please email Chipsee Technical Support at **support@chipsee.com**, providing all relevant information. We value your queries and suggestions and are committed to providing you with the assistance you require.